TP1-MPLS-parti2

Étape 1 : Activation de MPLS sur les routeurs de l'opérateur

SP1


```
*Oct  8 11:23:34.347: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/0, changed state to up
*Oct  8 11:23:34.347: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et2/0, changed state to down
*Oct  8 11:23:34.347: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et3/0, changed state to down
*Oct  8 11:23:34.347: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et4/0, changed state to down
*Oct  8 11:23:34.351: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et5/0, changed state to down
*Oct  8 11:23:34.351: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et6/0, changed state to down
*Oct  8 11:24:17.255: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on FastEthernet0/0
from LOADING to FULL, Loading Done
SP1>en
SP1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
SP1(config)#mpls label protocol ldp
SP1(config)#mpls ldp router-id loopback0 force
SP1(config)#interface fa0/0
SP1(config-if)#mpls ip
SP1(config-if)#end
SP1#
*Oct  8 11:27:01.035: %SYS-5-CONFIG_I: Configured from console by console
```

SP2

```
et5/0, changed state to down
*Oct  8 11:24:15.667: %OSPF-5-ADJCHG: Process 1, Nbr 3.3.3.3 on FastEthernet1/0
from LOADING to FULL, Loading Done
*Oct  8 11:24:16.959: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on FastEthernet0/0
from LOADING to FULL, Loading Done
SP2>en
SP2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
SP2(config)#mpls
% Incomplete command.

SP2(config)#mpls label protocol ldp
SP2(config)#mpls ldp router-id loopback0 force
SP2(config)#interface fa0/0
SP2(config-if)#mpls ip
SP2(config-if)#interfac
*Oct  8 11:28:17.427: %LDP-5-NBRCHG: LDP Neighbor 1.1.1.1:0 (1) is UPe
% Incomplete command.

SP2(config)#interface fa1/0
SP2(config-if)#mpls ip
SP2(config-if)#end
SP2#
*Oct  8 11:28:34.903: %SYS-5-CONFIG_I: Configured from console by console
```

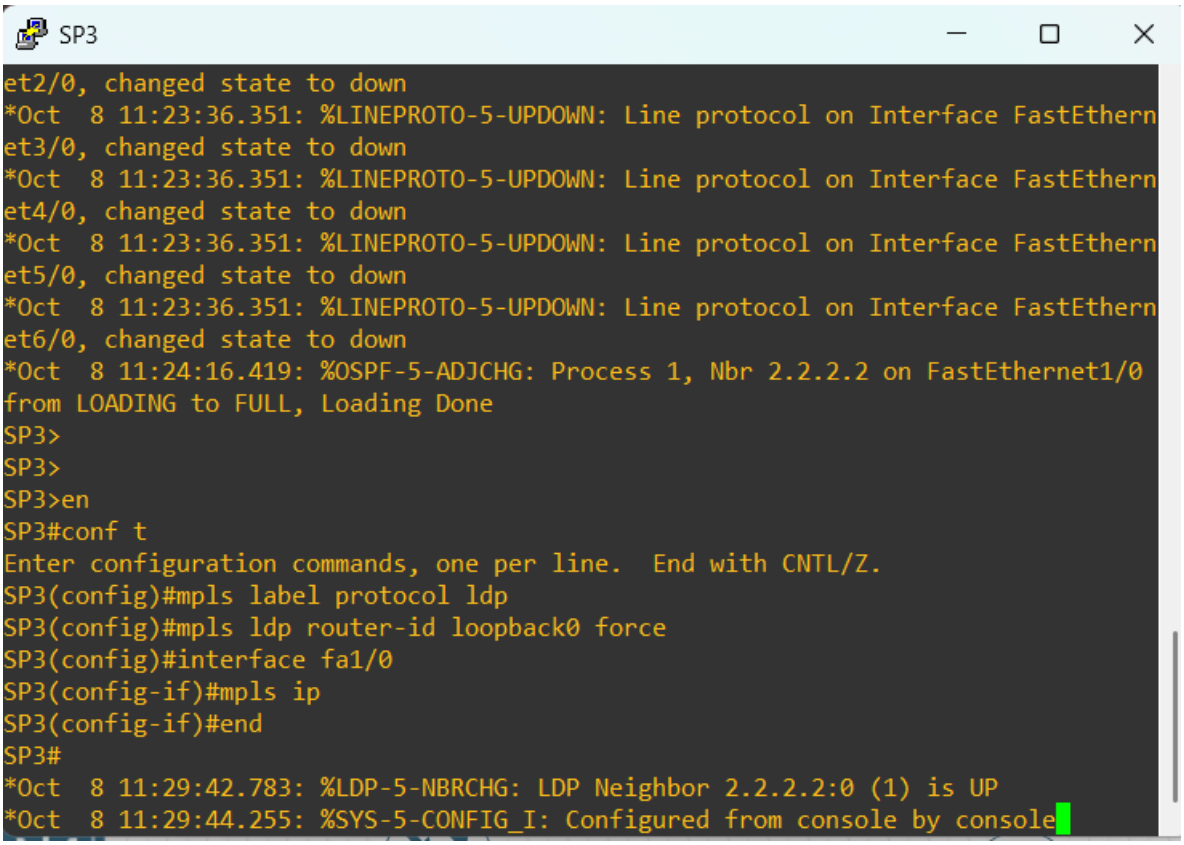

Étape 2 : Vérification

```
SP1#show mpls ldp neighbor
    Peer LDP Ident: 2.2.2.2:0; Local LDP Ident 1.1.1.1:0
        TCP connection: 2.2.2.2.44071 - 1.1.1.1.646
        State: Oper; Msgs sent/rcvd: 12/12; Downstream
        Up time: 00:03:27
        LDP discovery sources:
          FastEthernet0/0, Src IP addr: 192.168.23.2
        Addresses bound to peer LDP Ident:
          192.168.23.2    192.168.34.2    2.2.2.2
SP1#
```

```
SP2#show mpls ldp neighbor
    Peer LDP Ident: 1.1.1.1:0; Local LDP Ident 2.2.2.2:0
        TCP connection: 1.1.1.1.646 - 2.2.2.2.44071
        State: Oper; Msgs sent/rcvd: 12/13; Downstream
        Up time: 00:03:54
        LDP discovery sources:
          FastEthernet0/0, Src IP addr: 192.168.23.1
        Addresses bound to peer LDP Ident:
          192.168.23.1    192.168.12.1    1.1.1.1
    Peer LDP Ident: 3.3.3.3:0; Local LDP Ident 2.2.2.2:0
        TCP connection: 3.3.3.3.11357 - 2.2.2.2.646
        State: Oper; Msgs sent/rcvd: 11/11; Downstream
        Up time: 00:02:29
        LDP discovery sources:
          FastEthernet1/0, Src IP addr: 192.168.34.3
        Addresses bound to peer LDP Ident:
          192.168.45.1    192.168.34.3    3.3.3.3
SP2#
```

```
SP3#show mpls ldp neighbor
    Peer LDP Ident: 2.2.2.2:0; Local LDP Ident 3.3.3.3:0
        TCP connection: 2.2.2.2.646 - 3.3.3.3.11357
        State: Oper; Msgs sent/rcvd: 12/11; Downstream
        Up time: 00:03:05
        LDP discovery sources:
          FastEthernet1/0, Src IP addr: 192.168.34.2
        Addresses bound to peer LDP Ident:
          192.168.23.2    192.168.34.2    2.2.2.2
SP3#
```